

HyperCon - Hyperion configuration Tool - (V1.03.1) (1)

HardwareProcessGrabberExternalSSH

Device

Configuration name:

Type:

Adalight

Output:

/dev/ttyUSB0

Baudrate:

500,000

Delay [ms]:

0

RGB Byte Order:

RGB

Construction

Led top left: ☐ Led top right: ☐

Led bottom left: ☐ Led bottom right: ☐

Direction

clockwise

LEDs horizontal:

41

LEDs Left:

23

LEDs Right:

23

Bottom Gap:

0

1st LED offset

64

Image Process

Horizontal depth [%]:

8

Vertical depth [%]:

5

Horizontal gap [%]:

0

Vertical gap [%]:

0

Overlap [%]:

0

Blackborder Detection

☒ Enabled

Threshold [%]:

0

mode:

default

SaveLoadHelp/Wiki

Create Hyperion Configuration

HyperCon - Hyperion configuration Tool - (V1.03.1) (1)

HardwareProcessGrabberExternalSSH

Smoothing

☒ Enabled

Type:

Linear smoothing

Time [ms]:

200

Update Freq. [Hz]:

20

Update Delay:

0

Color Calibration

default

AddDelete

Transform [default]

Indices:

*

	Red	Green	Blue
Whitelevel:	255	255	255
Gamma:	2.5	2.5	2.5
Red Channel:	255	0	0
Green Channel:	0	255	0
Blue Channel:	0	0	255
Temperature:	255	255	255
Threshold:	0	0	0
Saturation gain:	1		
Luminance gain:	1		
Backlight:	0		

Send Trans. [SSH]

☐ Send Continuous

SaveLoadHelp/Wiki

Create Hyperion Configuration

HyperCon - Hyperion configuration Tool - (V1.03.1) (11)

Hardware Process **Grabber** External SSH

Internal Frame Grabber

☐ Enabled

Width: 64

Height: 64

Interval [ms]: 100

Priority Channel: 890

GrabberV4L2

☒ Enabled

Device: /dev/video0

Input: 0

Video Standard: NTSC

Width: -1

Height: -1

Frame Decimation: 2

Size Decimation: 8

Priority Channel: 900

3D Mode: 2D

Crop Left: 0

Crop Right: 0

Crop Top: 0

Crop Bottom: 0

Red Signal Threshold: 0

Green Signal Threshold: 0

Blue Signal Threshold: 0

Save Load Help/Wiki

Create Hyperion Configuration

HyperCon - Hyperion configuration Tool - (V1.03.1) (11)

Hardware Process Grabber **External** SSH

Kodi Checker

☒ Enabled

Kodi IP-Address: 127.0.0.1

TCP Port: 9,090

Menu: ☒ Audio: ☐ Pause: ☐

Video: ☒ Screensaver: ☒

Picture: ☒ 3D Check: ☒

Json / Proto / Boblight Server

Json Server TCP Port: 19,444

Proto Server TCP Port: 19,445

☐ Activate Boblight:

Boblight Server TCP Port: 19,333

Priority Channel: 900

Booteffect / Static Color

☐ Enabled

Static Color [RGB]: 0 0 0

Effect: Rainbow swirl fast

Duration [ms]: 3,000

Priority Chan.: 700

Proto/Json Forward

☒ Enabled

Proto target(s): "127.0.0.1:19447"

Json target(s): "127.0.0.1:19446"

Save Load Help/Wiki

Create Hyperion Configuration

HyperCon - Hyperion configuration Tool - (V1.03.1) (1)

Hardware Process Grabber External SSH

SSH - Connection

System: All Systems (not OE/LE) v

Target IP: 192.168.1.123

Port: 22

Username: osmc

Password: ●●●●

Connect Show Traffic

SSH - Manage Hyperion from HyperCon

Inst./Upd. Hyperion Remove Hyperion


Start Stop Get Log

SSH - Send Hyperion Configuraion

Local Config Path Send Config

SSH - Colorpicker

☒ Colorwheel ☐ Expertview

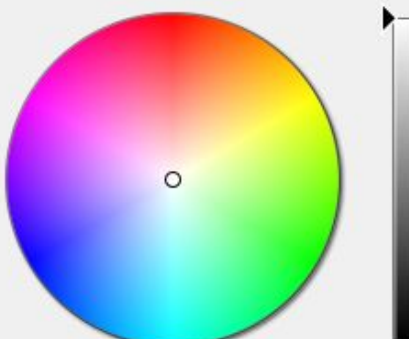

☐ Auto Update

Set Led Color Clear

Save Load Help/Wiki

Create Hyperion Configuration

